




# YARDMASTER 202S Training Collar System Operating Guide

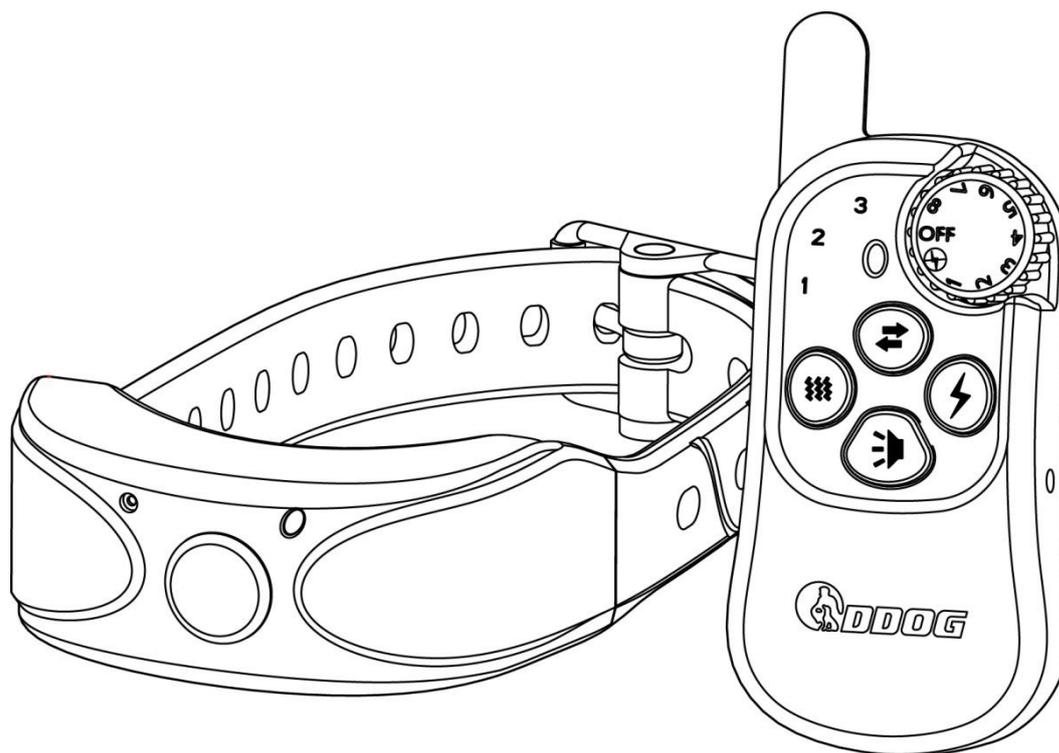

**Please read this entire guide before using this product.**

## Important Safety Instructions

***Warning – failure to follow these warnings and the usage instructions could result in serious injury or death.***

- **DO NOT** use the static stimulus feature of the collar on dogs with an aggressive temperament. This may cause them to inflict injuries to the dog owner or others. If you are unsure whether this product is appropriate for your dog, please consult your veterinarian or certified trainer.
- **DO** ensure that you comply with the fitting instructions in this manual for the collar. Skin damage (such as redness or bed sores) may develop when a collar has been worn for too long or made too tight around your dog's neck. To prevent injury to your dog, please ensure that:
  - the collar has been fitted properly in accordance with the instructions in the manual
  - the prongs on the collar do not exert excessive pressure on your dog's neck
  - the collar is not worn for more than 12 hours per day
  - the collar is repositioned on your dog's neck every 1 to 2 hours
  - the contact area of the collar is examined daily for signs of skin damage (redness or sores).

Some dogs are more prone to developing skin conditions than others. It is advised that you examine the contact area regularly when you first fit the product on your dog to ensure that your dog is tolerant of the pressure exerted by the collar on its skin. If skin damage occurs due to the use of the collar, discontinue use of the collar immediately until the damaged area has healed. If this condition persists beyond 48 hours, consult your local veterinarian.


- The collar is designed and tested on dogs and dogs only. **DO NOT** use the collar on humans or other animals apart from dogs.
- The collar is not a toy. Keep the collar, remote transmitter and the adapter cords out of reach of children.
- **DO NOT OPEN THE ENCLOSURE OF THE COLLAR, REMOTE TRANSMITTER OR THE POWER ADAPTER AT ANY TIME.** There are no user-serviceable parts inside. There is a serious risk of electric shock, fire or death if items are opened.
- **DO NOT** use the adapter with any other equipment.

## QUICK START GUIDE

### STEP 1 Power Up

Both the remote transmitter and the receiver collar are shipped with a full charge and can be used right away.

- (a) **Remote Transmitter:** turn the function dial on the remote transmitter from OFF to any other position. Make sure that the LED light is switched on and turns into a solid **green** color to indicate that the remote transmitter is ready for use.
- (b) **Receiver Collar:** press the blue ON/OFF button at the front of the collar and wait for the LED indicator light to turn into a solid **green** light.

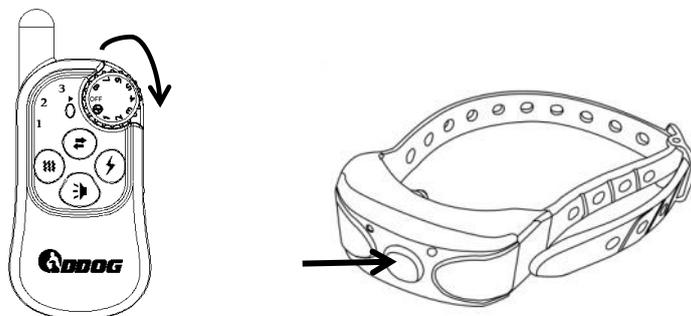

### STEP 2 Pairing the device

By default, the receiver collar and the remote transmitter have already been paired prior to shipment. To test whether or not the two devices have been properly paired, press the toggle button (if required) until the LED light next to the number “1” is switched on, then press the sound button on the remote transmitter and see whether the receiver collar responds with an audible tone signal.



If an audible tone signal is detected, it means that the two devices have been properly paired. Otherwise, please go through the pairing instructions on page 11 of this operating manual.

### STEP 3: Using the collar

The collar should now be ready for use. See pages 10-11 of this operating manual for an explanation on how to use the various features of the collar.

# Table of Contents

1. How does the DDOG® YARDMASTER 202S work? .....	5
2. Included Components .....	5
3. Product Diagrams.....	6
4. Technical Specifications.....	6
5. Features .....	7
6. Unboxing the YARDMASTER 202S for the First Time.....	7
7. Using the YARDMASTER 202S for the First Time.....	7
8. Testing the Static Stimulus Function.....	8
9. Fitting and Powering On the Collar .....	9
10. Sound/Tone Function .....	10
11. Vibration Function.....	10
12. Static Stimulus Function .....	11
13. Pairing a Remote Transmitter with a Receiver Collar.....	11
14. Charging the receiver collar and the remote transmitter .....	12
15. Replacing the plastic collar strap with the spare nylon strap.....	13
16. Frequently Asked Questions .....	14
17. Terms of use and limitation of liability .....	15

---


## 1. How does the DDOG® YARDMASTER 202S work?

The DDOG® YARDMASTER 202S Training Collar System offers a simple and effective way for home users to train their dogs. By pairing a remote transmitter with a receiver collar, a user can control the exact moment when a dog will receive a tone, vibration or static response on the receiver collar. The level of intensity is adjustable for static stimulation (8 levels) and fixed for tone and vibration signals (1 level each). The end result is a training system that allows users to teach basic obedience commands or thwart unwanted behaviors using one or a mix of different signals that can be triggered at such time and at such level of intensity as the users themselves determine as appropriate.


---

## 2. Included Components


The following components are included when you purchase the DDOG® YARDMASTER 202S Training Collar System:




Wrist Strap (x1)



Receiver Collar (x1)




Power Adapter (x1)




Test Light Tool (x1)




Remote Transmitter (x1)



Charging Cable (x1)



Nylon Strap (x1)



Nylon Strap Harnesses (x2)




Operating Manual (x1)


---

### 3. Product Diagrams

(a) Remote Transmitter

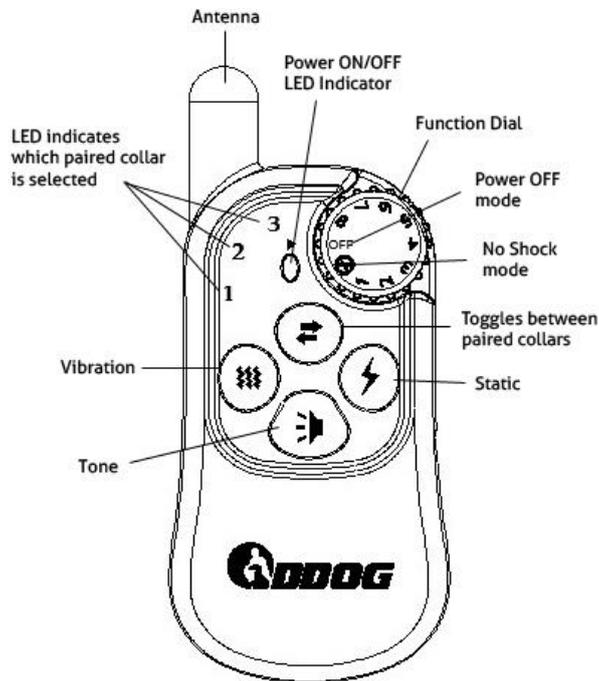

(b) Receiver Collar

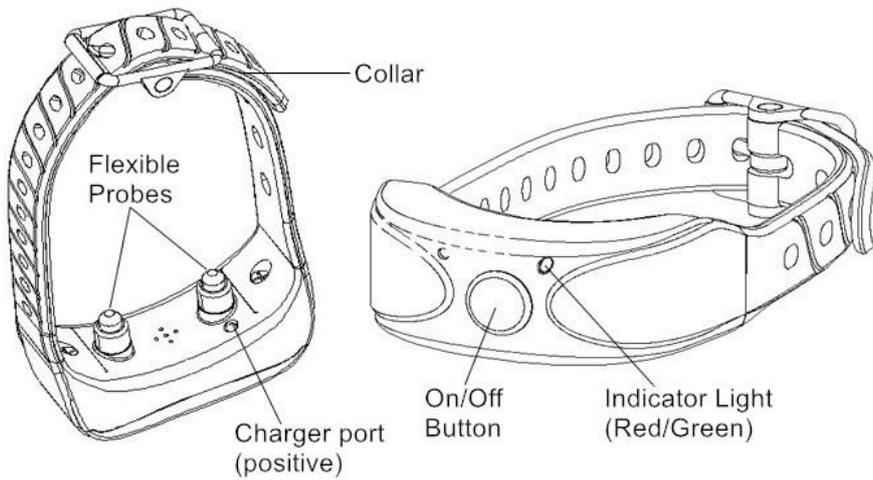

---

### 4. Technical Specifications

(a) Remote Transmitter

- Weight : 45g
- Dimensions: 10\*4\*2cm

(b) Receiver Collar

- Suitable neck size: 15cm – 53cm (collar strap is adjustable to fit different neck sizes)
  - Weight : 110g
  - Dimensions: 8\*3.5\*4.5cm
- 

## 5. Features

- 8 levels of static stimulation and 1 level of vibration and tone signals
  - 500 meters of reception in open field
  - 100% waterproof
  - Rechargeable and durable
  - Intuitive transmitter design avoids the need for pre-programming or function toggling during use
  - On/off switch on both the remote transmitter and receiver collar to extend battery life
  - Two color LED light on both the remote transmitter and receiver collar to indicate different statuses
  - Patented flexible probes ensures good contact with the dog's skin
  - Train up to 3 dogs at the same time using a single remote transmitter
- 

## 6. Unboxing the YARDMASTER 202S for the First Time

Please check that all of the components listed on page 5 have been shipped with the packaging box. If any of the components are missing, please contact us or your local distributor (as appropriate) for customer support.

The remote transmitter and the receiver collar are shipped with a full charge and are ready for immediate use. Please follow the instructions in the next section on how to use the DDOG® YARDMASTER 202S Training Collar System.


---

## 7. Using the YARDMASTER 202S for the First Time


When using the DDOG® YARDMASTER 202S Training Collar System for the first time, you should make sure that the receiver collar has been properly paired with the remote transmitter.

### Test for proper pairing

1. To test whether the pairing between the two devices has been properly configured, switch on the receiver collar by pressing the blue “On/Off” button at the front of the collar.



2. Next, adjust the function dial on the remote transmitter to a position other than OFF and press the toggle button (if required) until the LED light next to the number “1” is switched on to indicate that the remote transmitter will operate at the transmission frequency of the first paired receiver collar (which by default is the receiver collar that is shipped alongside the remote transmitter).

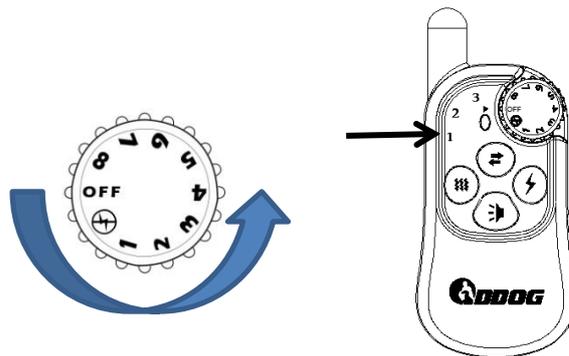

3. Next, press the sound button on the remote transmitter and see whether the receiver collar responds with an audible tone signal.



If an audible tone signal is detected, it means that the two devices have been properly paired. Otherwise, please go through the pairing instructions on page 11 to pair the receiver collar with the remote transmitter.

---


## 8. Testing the Static Stimulus Function

A test light tool is included with the packaging box for the purpose of testing the static stimulus function of the collar.

1. To begin testing, place the test light on top of the metal probes as shown below.



2. Then rotate the function dial to a level higher than 2 (otherwise the light emitted will be too weak to notice) and press the static button on the remote transmitter to trigger a static stimulus on the receiver collar. If the static stimulus function is working properly, the test light will start flashing.

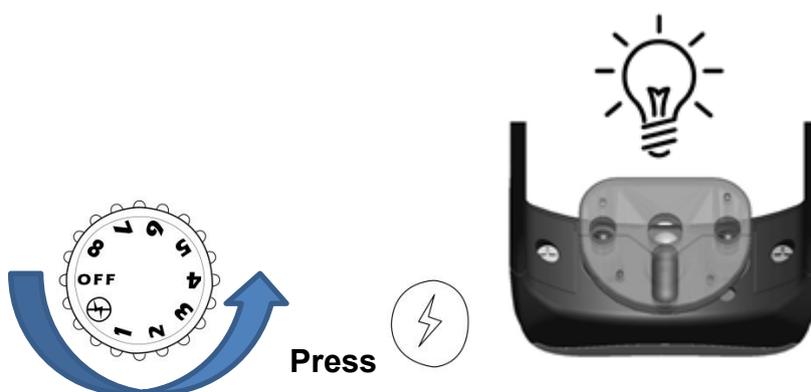

---


## 9. Fitting and Powering On the Collar

The receiver collar should be fitted snugly across the top of the dog's neck (as opposed to hanging it loosely at the bottom of the neck), yet loose enough to allow the user to slide one finger inside the strap. The collar casing should be positioned at the front and center of the neck and not rotated to either side. Both of the metal probes underneath the collar unit should be in good contact with the skin as shown below. For dogs with thick coats, it may be necessary to trim the hair underneath the collar unit to ensure that the probes are in good contact with the skin. Once the collar unit has been fitted, trim down the excess strap to a suitable length, if required.



The plastic collar strap can be removed and replaced with the spare nylon strap that comes with the packaging. See page 13 for detailed instructions on how this is done.

Press the blue “On/Off” button at the front of the collar. If a solid **green** light stays on after momentarily flashing in green and red color, it indicates that the collar is ready for use.

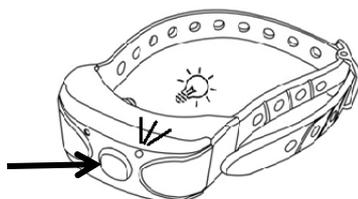

---

## 10. Sound/Tone Function

The sound button on the remote transmitter is the trigger for a tone signal on the receiver collar. Each time the sound button is pressed, provided that the collar and the remote transmitter are both switched on, a single tone signal will be generated. The collar is pre-set with only one level of tone signal, so unless the function dial has been parked at the OFF position, all other positions on the function dial will generate the same identical tone signal when the sound button has been pressed. If the sound button has been held down, a continuous stream of tone signals will be generated with a short time gap between each tone signal.




---

## 11. Vibration Function

The vibration button on the remote transmitter is the trigger for a vibration response on the receiver collar. Each time the vibration button is pressed, provided that the collar and the remote transmitter are both switched on, a single vibration response will be triggered. The collar is pre-set with only one level of vibration response, so unless the function dial has been parked at the OFF position, all other positions on the function dial will generate the same identical vibration response when the vibration button has been pressed. If the vibration button has been held down, a continuous stream of vibration responses will be generated with a short time gap between each vibration response.

Press 



---


## 12. Static Stimulus Function

The static stimulus button on the remote transmitter is the trigger for a short static stimulus on the receiver collar. The static stimulus is delivered to your dog via the metal prongs attached to the receiver collar.

The strength of the static stimulus is adjustable and can be varied from level 1 to level 8 on the function dial, but no static stimulus will be delivered if the function dial is in the OFF or No Shock mode . The No Shock mode on the function dial is a safety mechanism designed for users who only want to train their dogs using tone or vibration signals. Once the function dial has been parked at the No Shock mode, no static stimulation will be delivered by the receiver collar when the static button  has been pressed.

Each time the static stimulus button is pressed, a single static pulse will be triggered that lasts for a fraction of a second. If the static stimulus button has been held down, a continuous stream of static pulses will be triggered. For safety reasons, the stream of static pulses will be automatically cut off if the static stimulus button has been held down for more than 10 seconds. The user will need to release the static stimulus button to reset the device and press the button again to trigger another static stimulus response.


Press 



---

## 13. Pairing a Remote Transmitter with a Receiver Collar

A remote transmitter can be paired with a maximum of three different receiver collars.

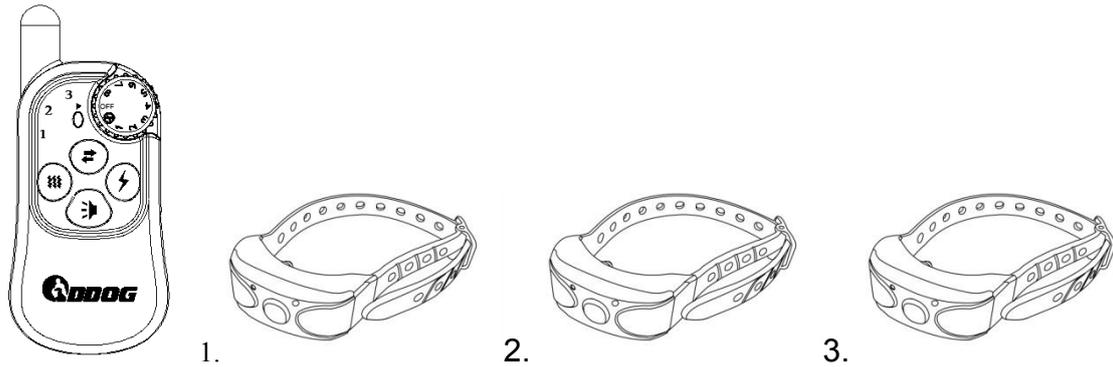


To begin pairing a receiver collar with a remote transmitter, switch on the remote transmitter and press the toggle button  until the LED light for the collar number that you wish to designate for the pairing has been switched on (e.g. if you want the receiver collar to be paired as collar number one, then toggle the remote transmitter until the LED light for “1” is switched on). Once the desired collar number has been selected, press and **hold down** onto the toggle button  until the collar number LED starts flashing. Next, with the receiver collar already in the OFF mode, press and **hold down** onto the power button of the receiver collar (i.e. turning it on) until you hear an audible tone. This will indicate that the pairing is successful. The toggle button of the remote transmitter and the power button of the receiver collar must be held down **at the same time** for the pairing to be successful.

To test whether or not the pairing is successful, try using the tone and vibration modes and see whether the collar responds. If not, then please go through the pairing instructions again to make sure all the steps have been followed.

---

## 14. Charging the receiver collar and the remote transmitter

The charging cable (see diagram below) that is shipped with the packaging box has three end points: one draws power from the power adapter; one provides a charge to the receiver collar and one provides a charge to the remote transmitter. The three end points allow the receiver collar and the remote transmitter to draw a charge simultaneously.



### (a) Remote Transmitter

If the indicator light on the remote transmitter starts flashing, it means that the battery of the remote transmitter is running low and needs to be charged up. When charging the remote transmitter, switch off its power and attach the cable end point that has a narrow body to the

charging pin at the side of the remote transmitter. The time to fully charge the remote transmitter is approximately 1.5 - 2 hours, and the indicator light will turn into a solid green to indicate that the battery is fully charged. The remote transmitter should remain operational for approximately 2 to 3 weeks on a full charge (assuming frequent usage).

(b) Receiver Collar

If the indicator light on the receiver collar starts flashing, it means that the battery of the collar unit is running low and needs to be charged up. When charging the collar unit, switch off its power and attach the cable end point that has a fat hollow body and a metal spike at the top to the charger port of the receiver collar. The hollow body of the cable end point needs to envelope the left metal probe of the receiver collar while the small metal spike at the top of the cable end point should be in contact with the charger port of the receiver collar, otherwise the collar unit won't receive a charge. The time to fully charge the collar unit is approximately 1.5 - 2 hours, and the indicator light will turn into a solid green to indicate that the battery is fully charged. The collar unit should remain operational for approximately 1 week on a full charge (assuming frequent usage).

---

## 15. Replacing the plastic collar strap with the spare nylon strap

A set of spare nylon straps is included with the box packaging that can be used to replace the standard plastic straps that are fitted on the receiver collar by default. The instructions for replacing the plastic straps of the receiver collar with the spare nylon straps are set out below:

- 1 Use a screwdriver to remove the two screws on the backside of the main collar casing that are used to secure the plastic straps to the main collar casing.
- 2 Locate the holes at both ends of the nylon straps. Place one nylon strap harness (see diagram below) over the hole at one end of the nylon strap and line them up on top of one of the screw holes (as mentioned in step 1) at the backside of the main collar casing so that the hole of the harness, the hole at the end of the nylon strap and the screw hole are all in alignment.



Make sure that the nylon strap harness is rotated to an angle that will allow it to be properly fitted to the cavity space at the backside of the main collar casing where the screw hole is situated.

- 3 Use a screwdriver to fix the harness and the nylon strap onto the main collar casing using one of the screws that had been retrieved from step 1.
- 4 Repeat steps 2-3 on the other end of the nylon strap to fix it to the main collar casing.

## 16. Frequently Asked Questions

Question	Answer
<p><b>Is the DDOG<sup>®</sup> YARDMASTER 202S training collar system suitable for training my dog?</b></p>	<p>The DDOG<sup>®</sup> YARDMASTER 202S training collar system offers maximum flexibility with 3 different training methods (tone, vibration and static) and 8 adjustable levels of static stimulus. This allows the collar to be used on dogs of various breeds and temperaments. The only exception is for dogs with an aggressive temperament, which we would advise against using the static stimulus feature as it may trigger the dog to attack the user or other dogs. If you are unsure whether this product is appropriate for your dog or not, please consult your veterinarian or certified trainer.</p>
<p><b>Is the DDOG<sup>®</sup> YARDMASTER 202S training collar system a safe and humane way to train my dogs?</b></p>	<p>Yes. The 3 different training methods offered by the DDOG<sup>®</sup> YARDMASTER 202S training collar system are engineered and tested to ensure that they do not cause any injuries to dogs, but only a sense of discomfort (at varying degrees as determined by the user) so that the train of thought or action sequence of the dog can be stopped or interrupted instantly.</p>
<p><b>How far is the range of the DDOG<sup>®</sup> YARDMASTER 202S training collar system?</b></p>	<p>The range of the DDOG<sup>®</sup> YARDMASTER 202S training collar system in open field is over 500 meters. The range may be shorter if the link between the remote transmitter and the receiver collar is impeded by obstacles or barriers.</p>
<p><b>What is the maximum number of receiver collars that can be paired with a remote transmitter?</b></p>	<p>The maximum is 3.</p>
<p><b>How long does the remote transmitter or the receiver collar last for on a single charge?</b></p>	<p>1 week for the receiver collar and 2-3 weeks for the remote transmitter (assuming frequent usage of the two devices).</p>
<p><b>The indicator light of the receiving collar is flashing. What does it mean?</b></p>	<p>The battery of the receiving collar is running low and the unit needs to be recharged.</p>
<p><b>The power LED of the remote transmitter is flashing. What does it mean?</b></p>	<p>The battery of the remote transmitter is running low and the unit needs to be recharged.</p>

---

## **17. Terms of use and limitation of liability**

### **Terms of Use**

Your purchase of the DDOG® YARDMASTER 202S training collar system signifies your acceptance of the product for use as per the instruction manual without modification of the terms, conditions, and notices contained. Use of this product signifies acceptance of all such terms, conditions and notices contained.

### **Proper Use**

The DDOG® YARDMASTER 202S training collar system has been designed for use with pets where training is desired. The specific temperament of your pet may not work with this product. We recommend that you DO NOT use this product if your pet is less than 8 lb or under 6 months old. We also advise against using the static stimulus feature of the training collar system on your dog if he or she has an aggressive temperament. If you are unsure whether this product is appropriate for your dog, please consult your veterinarian or certified trainer.

### **No Unlawful or Prohibited Use**

This product is designed for use with pet dogs only. This pet training device is not intended to harm, injure, or provoke. Using this product in such a way that is not intended could result in violation of Federal, State or local laws.

### **Limitation of Liability**

In no event shall the manufacturer of the DDOG® YARDMASTER 202S training collar system be liable for any direct, indirect, punitive, incidental, special consequential damages whatsoever arising out of or connected with the use or misuse of its products. The purchaser assumes all liability for using these products.

### **Modification of Terms and Conditions**

The manufacturer of the DDOG® YARDMASTER 202S training collar system reserves the right to change the terms, conditions and notices under which this product is offered.