

# Dog Shock Collar User's Manual

## (static impulse + vibration)

Thank you for choosing our product!

Please read this manual carefully before using the product.

Please be reminded that upon installing batteries in the receiver, you should immediately press the remote controller for three seconds, so as to match the remote controller and the receiver.

Please do read the Cautions, for fear that unwanted results arise from improper operation.





### I. Preparation before using

1. Make sure that batteries are installed in the remote controller and the receiver.
2. The remote controller and the receiver of this set are automatically matched. When batteries are installed in the receiver, the receiver will make a sound. At that time you should press any button on the remote controller and the receiver will give three successive sounds. In this way the match is done and the remote control system can operate normally.
3. If the receiver doesn't give a sound when batteries are installed, please take out the batteries for more ten seconds and put them back and try again.
4. Checking the remote controller: Press the buttons on the remote controller one by one and the indicator light will light. If the indicator light doesn't light or goes dim, change the batteries. The battery cell of the remote controller is magnetic, for turning on the power of the receiver.
5. Checking the receiver: The magnetic induction power switch being installed in the remote controller, when move the magnetic part of the remote controller close to the indicator light side of the receiver the indicator light will light, meaning the power is turned( ON). Another closing up of this will turn off the power while the indicator light goes (OFF)
6. When batteries are first installed in the receiver, the circuit will be automatically turned on. After it is closed by magnetic force, it can be open by magnetic force too. If the batteries are taken out and reinstalled, the circuit will be turned on.
7. Adjust the length of the collar to fit the neck of the pet. The proper tightness should be that you can insert a finger in between.
8. Respectively press the shock buttons or vibration buttons on the remote controller and the receiver will make static impulse or vibration.
9. Press the Sound button on the remote controller and both the remote controller and the receiver will make the "B-B" sound. There is a three-grade adjustment switch on the side of the remote controller for adjusting the volume of the "B-B" sound of the remote controller. The three grades are Loud / Low / Stop. You can train the pet to take your orders by different tempos. Every order must have a fixed tempo. An insisting training will bring you a wonderful effect. For example, three "B-B" sounds mean "coming back".
10. Press the Light button on the remote controller, red laser patterns will be given from the front of the remote controller and the receiver will give flashes of light at the same time. The red laser patterns is for the fun of the pet, while the light from the receiver helps you to look for your dog at night.
11. The static impulse of the collar is to curb the improper deeds of the pet. After each successful check, you should let the pet know what should be done and what should not be done. After a number of trainings the pet will understand what you like and don't like.
12. Prepare some socks for the dog as rewards for good deeds. This will make better effect in the training.

### II. Operational instructions:

1. Turn the switch of the remote controller to the "ON" position. Turn it "OFF" if you don't use it, for fear of mistaken operation.
2. Open the insert buckle of the collar and put the collar round the neck of the pet. Adjust the tightness of collar that you can insert a finger in between.
3. Most pets feel uncomfortable at first wearing the collar. Don't use the shock function at that time until you are sure that the pet has gotten used to the collar. The static impulse is used to curb the improper deeds of the pet. Don't use it casually or to make fun of the pet.
4. You can call your dog soundlessly by "vibration" in a long distance. You can also use the "B-B" sound to convey your orders.
5. The B-B sound of the remote controller can be adjusted by the pushrod switch on the side: Loud / Low / Silent.
6. Flashes of light will make it easy for you to look for your dog at night. The laser patterns will provide fun for the pet.
7. You can turn off or turn on the power of the receiver by the magnetic part of the remote controller.
8. If you don't use this product, take the collar and receiver off the pet and turn off the power, so as to prolong the lifetime of the batteries.
9. If you don't use the collar receiver for a long time, take out the batteries.

- Features:
1. the strong static impulse can penetrate the hair of the pet and fabric within 6mm thick. it is unnecessary to let the discharging point touch the skin of the pet, therefore it is safe for the pet.
  2. the static impulse can quickly and effectively curb the improper deeds of the pet.
  3. the warning vibration will let the pet associate the vibration with static impulse, in the end, vibration will achieve the same effect as the static impulse.

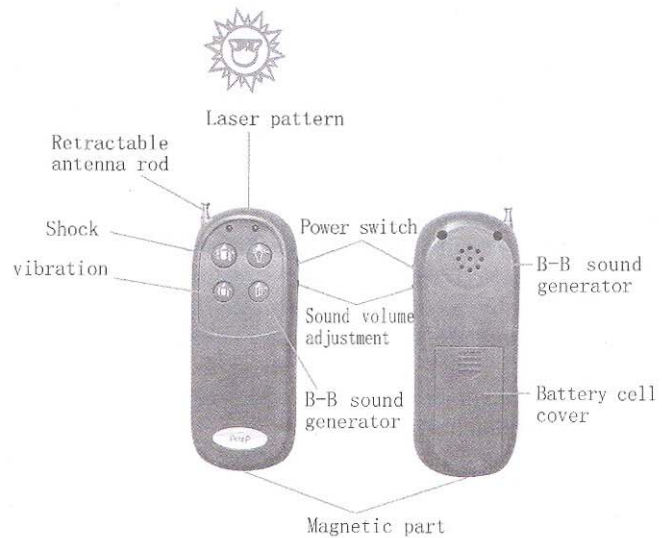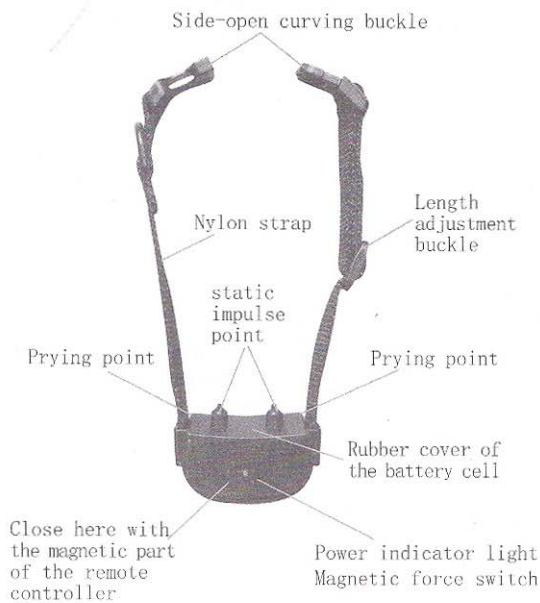

### III. How to change the batteries:

1. Receiver: Take off the rubber bottom cover at one side of the collar by prying it with a proper tool and you will see two batteries (model: AAA / 1.5V). Take out the batteries and install the new ones. Pay attention to the polarity of the batteries. Mount the rubber bottom cover and press it tight.
2. Remote controller: The battery cell cover is at the lower part of the back of the remote controller. Open the cover by pressing it following the direction of the arrow. Take out the battery (Model 6LR61, 9V) and put a new one back and then close the cover.
3. The batteries used for this product are ordinary ones, which can be found in supermarkets and department stores. Please indicate the correct model while buying them.
4. The lifetime of the batteries vary according as how you use the product. Since the remote controller only consumes electricity when you press the buttons to send signals, its batteries' lifetime is usually more than one year. After the receiver is turned on, it is in a standby state. In the standby state, it only consumes small amount of electricity. A frequent use of it will consume electricity quickly. Therefore you should often check the batteries by watching the indicator light. In order to prolong the lifetime of the batteries, when you don't want to use the receiver for some time, turn off the power of the receiver by the magnetic force of the remote controller. If you don't use it for a long time, take out its batteries.

### IV. Cautions:

1. At first wearing this collar, some pets will feel uneasy. Give the pet some time to get used to it. Don't use the shock function of this product until you are sure that the pet has gotten used to it.
2. A magnetic induction switch is installed in the receiver. Therefore if you don't want to use the product for some time, please turn off the power of the receiver by the magnetic part of the remote controller. You can also take out the batteries to prolong their lifetime.
3. Digital audio transmitting technology is applied in the remote controller. Remote control signals can penetrate obstacles. It is unnecessary for the remote controller to point directly at the receiver. However, obstacles will affect the valid distance of remote controlling.
4. The valid distance of remote controlling means the straight-line distance between the remote controller and the receiver without obstacles in between. If there are interference signals or signal screening around, the actual remote control distance may be shorten.
5. The B-B sound and the low frequency vibration can be used for training the pets. In order the pet can understand your meaning, you should use fixed tempos in training. Good effect can only be achieved by lasting use of it.
6. The static impulse vibration of the receiver is used to curb the improper deeds of the pets. You should not use this function for a long time (the time should be within 30 seconds) for fear the receiver being damaged from overheat and consuming too much battery electricity. Please be advised that don't use the high frequency vibration to make fun of the pet.
7. Presently, this product is the most humane tool for pet training. Following the correct operational instructions, you can effectively train the pet and bring it no harm.
8. Though the receiver is waterproof, you cannot immerse it into the water for a long time. And you should keep the remote controller out of water.