



User Manual

Training Collar System

Table of Contents

Important Safety Information.....	2
Components	3
Key Definitions	4
Features	6
How the Dog Training System Works	7
Operating Guide	7
Step1 Prepare the Remote Transmitter and Receiver Collar.....	7
Step2 Pairing Collar Receiver to Transmitter.....	9
Step3 Test the Training System Functions.....	10
Step4 Fit the collar-receiver.....	11
Step5 Re-thread the collar(as diagram)	12
Frequently Asked Questions.....	13
Troubleshooting	14
General Training Tips	15
Addendum and Upgrading Notes.....	16

Important Safety Information

WARNING: Not for aggressive dogs. Do not use this product if your dog is aggressive, or if your dog is prone to aggressive behavior. Aggressive dogs can cause severe injury and even death to their owner and others. If you are unsure whether this product is appropriate for your dog, please consult your veterinarian or certified trainer.

CAUTION:

Risk of skin damage: Please read and follow the instructions carefully in this guide. Proper fit of the collar is important because a loose collar may cause inconsistent performance. A collar worn for too long or made too tight on the pet's neck may cause skin damage, ranging from redness to pressure ulcers (commonly known as bedsores).

- Avoid leaving the collar on the dog for more than 12 hours per day.
- When possible reposition the collar on the pet's neck every 1 to 2 hours.
- Check the fit to prevent excessive pressure. And it is okay to trim any excess strap length.
- Never connect a lead to the electronic collar because it may cause excessive pressure on the contacts.
- Wash the dog's neck area and the contacts of the collar weekly with a damp cloth.
- Examine the contact area daily for signs of a rash or a sore.
- If a rash or sore is found, discontinue use of the collar until the skin has healed.
- If the condition persists beyond 48 hours, see your veterinarian.

These steps will help keep your pet safe and comfortable. Millions of pets are comfortable while wearing stainless steel contacts. Some pets are sensitive to contact pressure. You may find after some time that your pet is very tolerant of the collar. If so, you may relax some of these precautions. It is important to continue daily checks of the contact area. If redness or sores are detected, discontinue use until the skin has fully healed.

Thank you for choosing the pettrainer brand! You and your pet deserve a companionship that includes memorable moments and a shared understanding together. Our mission is to ensure your pet's safety by providing you the tools and techniques to successfully train your pet. Should you have any queries, please contact our customer service.

NOTE: Please charge before using the product.

Components

PET617-1(1 for 1)



PET617-2(1 for 2)



Key Definitions




- 1. Antenna:** Transmits signal from Remote Transmitter to the Collar Receiver
- 2. Indicator Light :** Flashes green or solid green when any of the stimulation buttons are pressed and solid red when charging the battery or no power.
- 3. LCD Screen:** Indicates the intensity level of stimulation currently selected and battery life. When pressing stimulation buttons, the LCD screen will notify if which receiver receiving stimulation.
- 4. Intensity Dial :** Rotate the dial to adjust the level of stimulation from 0 to 100.
- 5. Toggle Switch :** Toggle switch swaps between continuous and momentary mode. If the toggle switch is to the left, all stimulation buttons are now continuous and if to the right, all stimulation buttons are now momentary.

6. **Power Button:** Powers the Remote Transmitter on and off and has another function that enables a mode that will vibrate the Remote Transmitter when pressing stimulation buttons.
7. **Vibration Button 1:** Delivers continuous or momentary vibration to the first receiver, depending on the position of the Toggle Switch.
8. **Static Button 1:** Delivers continuous or momentary static shock to the first receiver, depending on the position of the Toggle Switch.
9. **Vibration Button 2:** Delivers continuous or momentary vibration to the second receiver, depending on the position of the Toggle Switch.
10. **Static Button 2:** Delivers continuous or momentary static shock to the second receiver, depending on the position of the Toggle Switch.
11. **Charging Jack:** Charges the battery of the Remote Transmitter when connected to a power source.
12. **Belt Clip:** Allows for the possibility of hands free training.
13. **Pairing Symbol :** Pairs the Remote Transmitter to the Collar Receiver(s) or powers off the Collar Receiver when properly aligned.
14. **Rubber Cover:** Protects the internal components of the Remote Transmitter from dust and water. Always remember to replace after charging is complete.



- 1 **Contact Points:** Contact points cover the metal screws, and through them vibration or static shock stimulation is delivered.

- 2 **Charging Jack:** Charges the battery of the Collar Receiver when connected to a power source.
- 3 **Pairing Symbol:** Pairs the Collar Receiver to the Remote Transmitter or powers off the Collar Receiver.
- 4 **Rubber Cover:** Protects the internal components of the Collar Receiver from dust and water. Always remember to replace after charging is complete.
- 5 **Light :**



- A When charging, the LED light is red; when fully charged, it turns to green.
- B In "standby" status, the LED light in the collar-receiver will flash green every four secs.
- C Stimulation Buttons pressed on the Remote Transmitter will cause a green light to appear on the Collar Receiver.
- D Pairing the Remote Transmitter and Collar Receiver will produce a solid green light.

Features

1. Rechargeable Remote Transmitter and Collar Receiver.
2. Waterproof Remote Transmitter and Collar Receiver.
3. LCD Display featuring a blue backlight for nighttime usage.
4. 100 intensity levels of Vibration.
5. 100 intensity levels of Static Shock.
6. Easy to use, adjustable Intensity Dial.
7. Simple, ergonomic design layout.

8. Belt Clip.
9. Quick and straightforward pairing process.
10. Range of 650 Yards.
11. Capable of simultaneous control of two dogs (extra receiver is purchasable).
12. Swap effortlessly between Continuous and Momentary stimulation.
13. Adjustable TPU strap to accommodate any size of dog.
14. Conserves power when not in use to extend battery life.
15. Power Saving:
 - The collar-receiver, if left unused for 5 minutes, will enter into "DEEP SLEEP" status, yet it can be activated by any movement.
 - The remote transmitter, if left unused for 2 minutes, will enter into "STANDBY" status; if unused for 5 minutes, it will enter into "DEEP SLEEP" STATUS. To activate the transmitter in separate cases, you can simply press any button (except the LED LIGHT button) and the "MODE" button (for 1 sec) separately.

How the dog training system works?

Ipets products are reliable, effective, and comfortable for large or small dogs. The system assists in controlling your dog without a leash in a range up to 650 yards away! Instantly send a signal from the Remote Transmitter, which activates your dog's Collar Receiver. The dog will receive an annoying but safe, harmless stimulation. With correct, consistent use of this product, the dog will associate his misbehavior with your corrections, and soon enough, you will have a well-trained dog. This particular model features adjustable levels of stimulation, enabling the user to tweak accordingly to the dog's temperament, removing the risk of over stimulation.

Operating Guide

Step 1 Prepare the Remote Transmitter and Receiver Collar:

Charge the Remote Transmitter and Receiver Collar

1. Uncover the Charging Jack by lifting the Rubber Cover.
2. Insert the charging connector into the Charging Jack.
3. Plug the charger into a standard wall outlet.
4. A solid red light will appear on the Indicator Light, indicating charging is occurring.
5. Once charging is complete, the solid red light will turn to a solid green light.

6. Replace the Rubber Cover to protect the Charging Jack.

Note: Before first use, charge the Remote Transmitter and receiver Collar until completion.



Powering on and off the Remote Transmitter

Press and hold the Power Button for several seconds, the LCD display will appear and the Transmitter Indicator Light will turn to solid green.

To power off the Remote Transmitter, press and hold the Right Side Button for a few seconds, and Indicator Light will turn to red.

Powering on and off the Collar Receiver

To power on the Remote Collar Receiver, align the Remote Transmitter Pairing Symbol with the corresponding Collar Receiver Pairing Symbol, once the Receiver Indicator Light is green separate the two Pairing Symbol. The Collar Receiver is now on.

To power off the Remote Collar Receiver, realign the Remote Transmitter Pairing Symbol Transmitter with the corresponding Collar Receiver Pairing Symbol, once the Receiver Indicator Light goes red separate the two Pairing Receptacles. The Collar Receiver is now off.

NB: The indicator light of collar-receiver will flash red if it needs recharging.



Step 2 Pairing Collar Receiver to Transmitter

1. Press and hold the Power Button for a few seconds to power on the Remote Transmitter.
2. Rotate the Intensity Dial to 0.
3. Ensure the Collar Receiver is off.
4. Align the Remote Transmitter Pairing Symbol with the corresponding Collar Receiver Pairing Symbol, hold until the Receiver Indicator Light is a steady green, once the steady green light begins to flash, press the Vibration Button 1 immediately. Pairing is now complete.
5. If needing to pair a second Collar Receiver follow steps 2 – 4 but instead of pressing the Vibration Button 2 immediately.

NB: According to the factory default settings, when the collar-receiver has been turned on the syncing should be completed within 10 secs, thereby you have to press the Vibration button in good time or press it at least within 10 secs. Please DO NOT try to sync the transmitter with the two collar receivers (if any) at the same time.

Step 3 Test the Training System Functions

The testing methods will help determine whether the training system is functioning as intended. Please ensure that the pairing process is complete before attempting to test the functionality.



(Figure 2-1)



(Figure 2-2)

Test the static shock function(Figure 2-1)

1. Put the test light over the Screws of the Collar Receiver.
2. Turn on the Remote Transmitter and adjust the Intensity Dial off 100.
3. There is an option for continuous stimulation or momentary if desiring continuous; push the Toggle Switch to the left position and if desiring momentary, move the Toggle Switch to the right position.
4. After deciding the type of stimulation, press either Static Button or 1 or Static Button 2, depending on which receiver is undergoing the test, the test bulb will flash, indicating the Static Shock function is operating correctly

Testing the Vibration Functions(Figure 2-2)


1. Power on the Remote Transmitter, and adjust the Intensity Dial off 100.
2. There is an option for continuous stimulation or momentary, if desiring continuous; push the Toggle Switch to the left position and if desiring momentary, move the Toggle Switch to the right position.

3. After deciding the type of stimulation, press either Vibration Button 1 or Vibration Button 2 ,depending on which receiver is undergoing the test , the Collar Receiver Collar Receiver will vibrate.

Step 4 Fit the collar-receiver

Important: The proper fit and placement of the Collar Receiver is essential for effective training. The contact points must have direct contact with the dog's skin.

- (1) To fit the Collar Receiver, attach the Collar Strap to the Receiver.
- (2) With the dog standing in front of you, place the Collar Receiver around the dog's neck, so the receiver box and Contact Points are on the underside of your dog's neck, making direct contact with the dog's skin. If direct contact is not possible, shaving some fur away, ensuring good contact is recommended.
- (3) Fasten the collar strap. The fit should be snug, but not taut. A finger should be able to be placed beneath the collar strap when around the dog's neck.
- (4) Allow the dog to wear the Collar Receiver for several minutes and check the strap again. The dog will soon become more familiar with the Collar Receiver, so it is crucial to ensure the fit comfortable and flattering.



CAUTION: RISK OF SKIN DAMAGE

- For comfort, safety and effectiveness of this product please check the fit of the dog's collar frequently. If observing any skin irritation, immediately discontinue use of the collar for a few days. If the skin condition persists beyond 48 hours, consult a veterinarian.
- Do not attach a leash to the collar, which can result in squeezing the Contact Points too tightly against your dog's neck.
- The design of the Collar Receiver discourages constantly wearing the device. Pettrainer recommends the collar not wearing for more than 12 hours out of every 24-hour period.


- Most dogs feel uncomfortable when wearing the collar for the very first time. Do not use any functions until the dog is accustomed to the collar.
- Pettrainer suggests giving the dog, the vibration stimulation before following it with a static shock. After training for a while using this method, the dog will be aware that after vibration comes a static shock. Vibration will act as a warning, and static shock only acts as a menace that might be necessary sometimes.

Step5 Re-thread the collar(as diagram)

Step 5 Re-thread the collar (as diagram)

Regular Maintenance

- Ensure Contact Points are not too tight on a weekly basis.
- Rinse the Contact Points with alcohol on a weekly basis.
- Check the dog's neck for irritation and wash the dog's neck on a weekly basis.

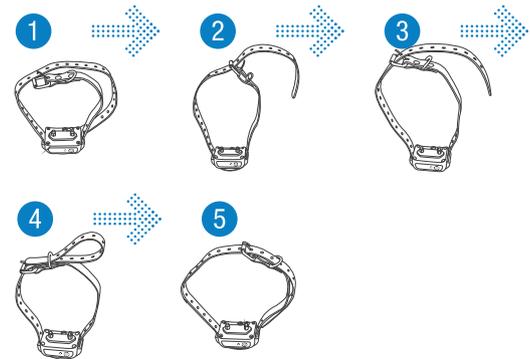

Frequently Asked Questions:

How old does the dog have to be before using the system?

Your dog should have learned basic obedience commands such as, "sit" or "stay." The Collar Receiver might be too large for dogs under 15lbs.

Once my dog completes training and is been obeying my commands, will he have to wear the collar?

Probably not, but you may try to reinforce training with the collar.

Can I use the Ipets rechargeable training collar with more than one dog?

Yes, you just need to purchase another Collar Receiver for the system.

Is the Collar Receiver waterproof?

Yes, but always ensure that the Rubber Cover seals the Charging Jack

Can I replace the Collar receiver with another kind of collar?

No.

Can I attach a leash to the Collar Receiver?

No, this can result in pulling the Contact Points too tightly against the dog's neck. Attach a leash to a separate, nonmetallic collar or a harness. Ensure the extra collar does not put pressure on the Contact Points.

How long can I leave the Collar Receiver on my dog?

The design of the collar discourages constant wearing. We recommend not having the dog wear the collar for more than 12 hours out of every 24-hour period.

Is the training system suitable for all dogs?

The collar is adjustable from length 5.9"(15cm) to 19.6"(50cm), if the dog's neck circumference is smaller than 5.9", you will be forced to rethread the collar, if the dog's neck circumference is larger than 22", this collar may not be suitable for the dog. This collar is not suitable for dogs under 15lbs.

Troubleshooting

My dog is not responding after the training system installed successfully.

- Charge the Remote Transmitter and Collar Receiver for 2 hours, separately before first use.
- Ensure if the Remote Transmitter and Collar Receiver power is on.
- Check the intensity levels of vibration and static shock, making sure it is not set to 0.
- Ensure the Collar Receiver has sufficient power to operate.
- Check the collar to ensure it fits snugly against your dog's neck.
- If tested for all of the above and the dog is still not responding, please try repairing the Remote Transmitter and Receiver Collar.

The Remote Transmitter does not work.

Check the battery status of the Remote Transmitter.

Press and hold the Power Button for a few seconds to power on the Remote Transmitter.

My collar-receiver works great for some time, yet it does not work after charging.

- First, check if the receiver has been charged correctly. Check the "prepare the collar-receiver" part of the guide for the correct charging method.
- Check if the receiver has been turned on.

I want to test the collar-receiver on myself, but it does not work.

- When testing the receiver on your hands, please touch the 2 electrodes at the same time as touching one single electrode will not work.

General Training Tips

The following tips on how to get the best out of your Pettrainer Training Collar.

- (1) Make training sessions short and positive (between 10-15 minutes long for each session.) This will enable the dog to keep its attention focused on the trainer.
- (2) Train one dog at a time.
- (3) During the first initial training sessions, keep the dog in a familiar outdoor environment. Training in new locations may cause the dog to become distracted, causing you to reinforce commands with the Collar Receiver more than necessary.
- (4) Use a long leash fastened to a non-metallic collar to help the dog's learning. Ensure the additional collar and lash does not interfere with the Contact Points of the Collar Receiver. Do not use the remote training collar without a long leash until your dog is fully trained.
- (5) More success will occur by teaching the dog a command first before trying to reinforce the command with the Remote Transmitter.
- (6) For basic obedience training, vibration is more useful.
- (7) Issue one obedience command at a time, this will reduce confusion and allow the dog to remain focused. Do not use the training system for commands that the dog has not learned.
- (8) During training, look for all the positive changes in the dog's behavior and remember to reinforce them promptly with ample praise and reward.
- (9) Avoid over-correcting your dog. Use as little remote correction as possible during the training process.
- (10) When the dog has become apparently perplexed, shift the focus of the training by drawing the dog's attention to a command they have familiarity. Example: Tell the dog to sit and give abundant praise and encouragement on successful completion of the sit command.
- (14) Do not use the training system to correct or eliminate forms of aggression or biting behavior. When the dog is showing signs of aggressive behavior,

immediately contact a professional dog trainer in your local area.

(15) Please keep in mind, that you should keep training sessions short and end every session on a high note. Stop Training and play with the dog as soon as the dog has accomplished a new level of proficiency.

SIZE	NECK GIRTH (IN)	CHEST GIRTH (IN)	BACK LENGTH (IN)	WEIGHT (LBS)	BREED
X-SMALL	7.8-8.6	9.8-11.8	7.4	1-10	Chihuahua, Yorkshire, Terrier
SMALL	7.8-9.4	11.4-14.1	9.0	11-25	Poodle, Pomeranian
MEDIUM	9.0-11.0	13.7-16.5	11.0	26-40	Shih Tzu, Maltese Dog
LARGE	10.6-12.2	16.1-18.5	12.2	41-70	Miniature Schnauzer, Pekingese
LARGE	11.8-13.3	18.1-20.8	13.7	71-90	English Cocker Spaniel
LARGE	12.9-14.5	20.4-23.2	15.7	91-110	Beagle
X-LARGE	16.9-18.9	29.9-33.0	23.6	N/A	Husky
X-LARGE	18.5-20.4	34.6-38.1	23.6	N/A	Labrador Retriever
X-LARGE	20.4-24.4	36.2-39.3	27.5	N/A	Golden Retriever, Old English Sheepdog

Addendum and Upgrading Notes:

Please note that when shaking the receiver you may hear a rattling noise, which is actually caused by the built-in vibration sensor and is by no means an indication of any malfunction in the receiver.